




Application

- T-bar for mounting 2 x Comrod directional or omnidirectional antennas onto Comrod AMX series masts.
- 650mm antenna spacing (other spacing available)
- M8 male antenna mounting threads (x2)
- Ø24mm mast spigot for AMX54 mast, or socket for AMX85/AMX91 mast.
- M6 female threads (x4) for masthead radio/ancillary mounting
- Four holes for cable strain relief and/or upper guys.



2 x Comrod omnidirectional antennas
(UHF760M shown)

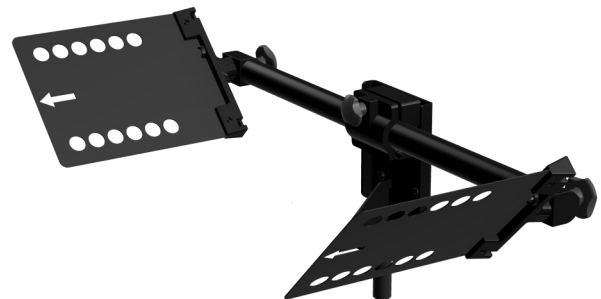


2 x Comrod directional antennas
(UHF760DA shown)


Mechanical Specifications

Design	Aluminum fabricated cross boom
Dimensions	See outline drawing
Weight	1.5 kg
Finish	Black anodized and self color black
Temperature range	-55 °C, +71 °C; -67 °F, +160 °F


Outline Drawing (Ø23.2 spigot)

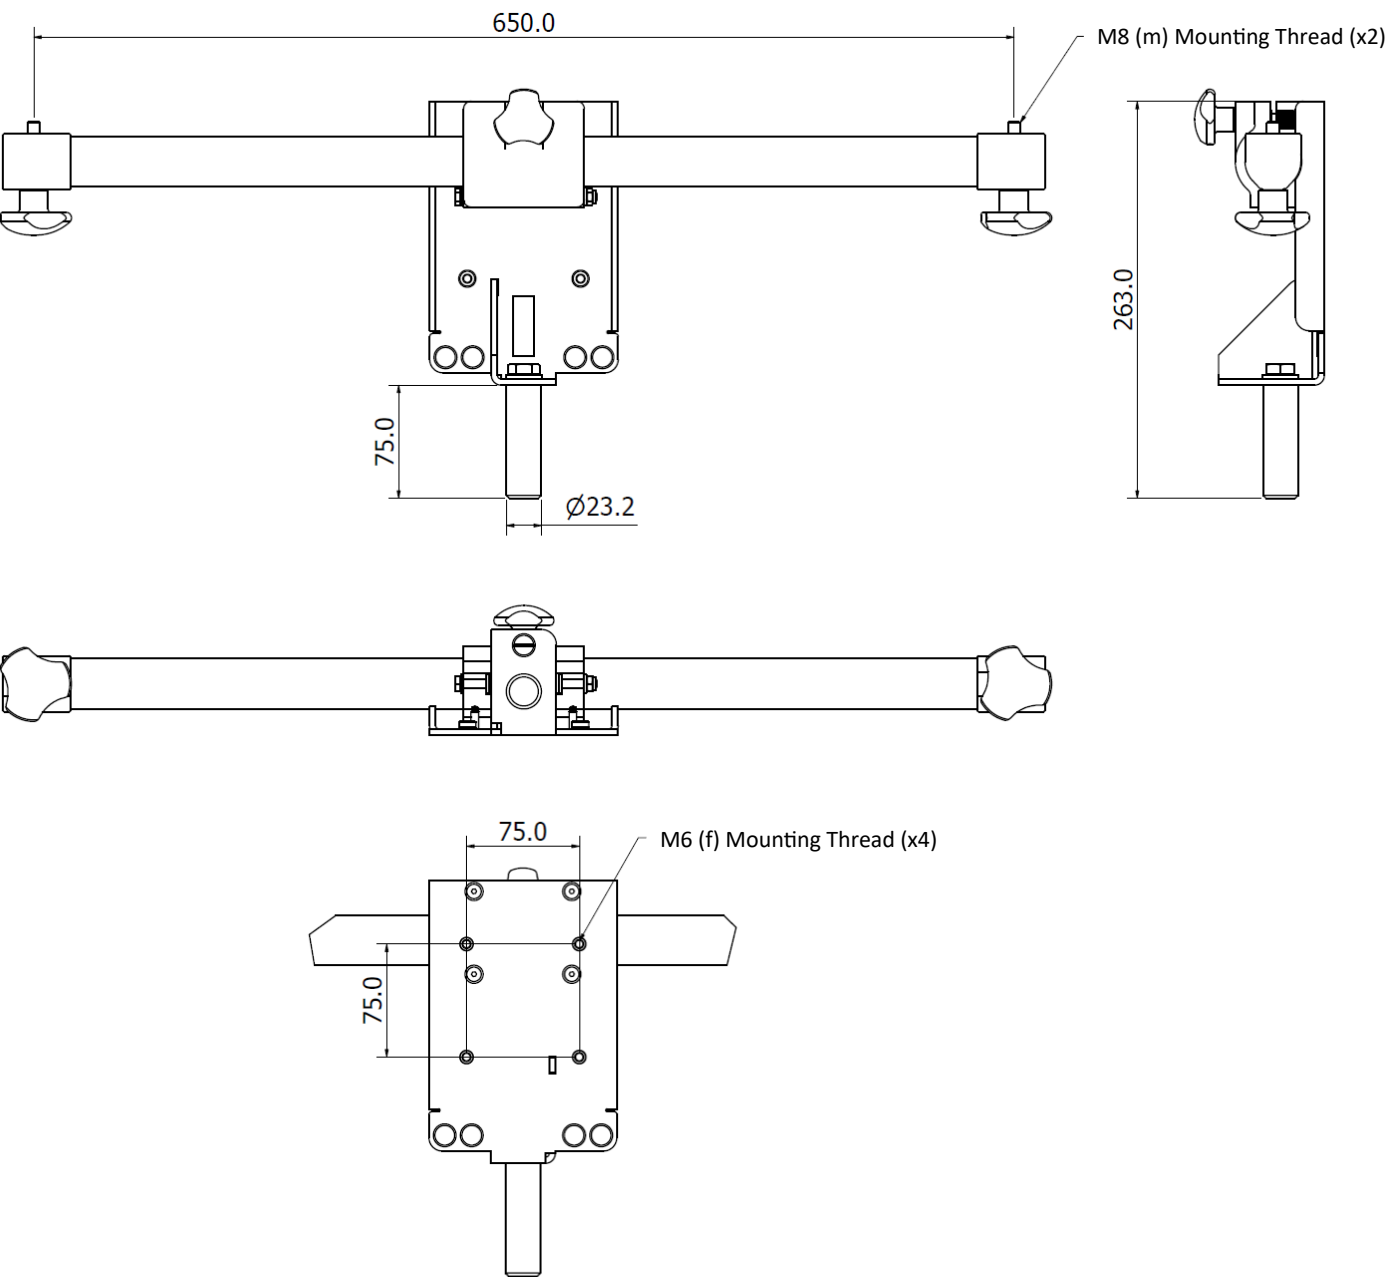

Interface Options

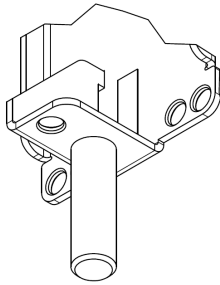

Ø23.2 spigot
for AMX54
sectional mast

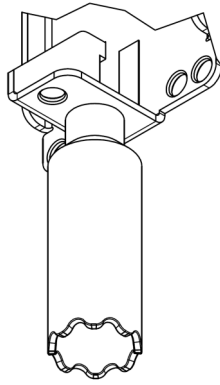

AMX85 socket for
AMX85/AMX91
sectional mast