

### Description

AC Output cables are used to connect a ComCompact series power supply to the load. Cable lengths and connector combinations are available to suite the customer requirement. Open-end cables are also available. See table below for standard cable/connector combinations.




### Part Number Configuration - P600XXX.YYY.ZZZ

XXX = connector configuration (see table for options)

YYY = cable length in cm (300 = 3m). For lengths longer than 10 meters use two digits followed by meters unit m, i.e. a 25 meter cable will have suffix 25m

ZZZ = Right angled connector orientation in degrees.  
Omit ".ZZZ" to order straight connector.

### Examples

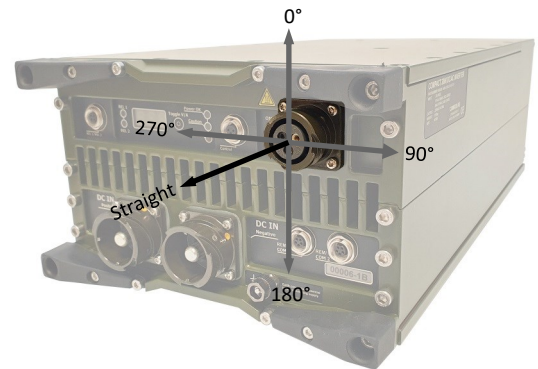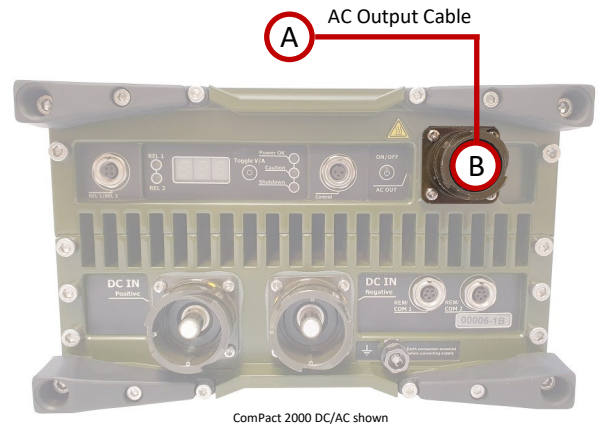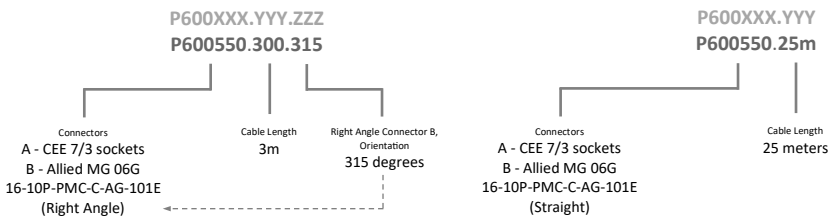

**Cable Orientation**  
Right angle connector - specify angle (ZZZ)  
Straight connector - no specific orientation

ComCompact 2000 DC/AC			
	Straight	Straight	Open-end
			
	Part Number P600550.YYY	Part Number P600552.YYY	Part Number P600551.YYY
	Standard Lengths P600550.300 - 3m	Standard Lengths P600552.300 - 3m	Standard Lengths P600551.300 - 3m
<b>A</b>	AC Load Connector 2-pole +/-, 16A 250v, CEE 7/3 sockets	AC Load Connector 2-pole +/-, 16A 250v, CEE 213-6	AC Load Connector Open-end (no connector)
<b>B</b>	AC Output Connector Allied MG 06G 16-10P-PMC-C-AG-101E or similar		
	General Cable: H07RN-F, 3G2.5, black, outer diameter 11.8 mm, minimum bending radius 35mm Assembly: ROHS and Cadmium free		