




Features


- DC block for inner and outer conductor



- 30-512 MHz
- Low loss

Electrical specification

Frequency range	30-512MHz
VSWR	< 1.4:1
Nominal impedance	50 Ohm
Power rating	50 W
In-band Loss	-0.4 dB
Connectors	2 x N Type female

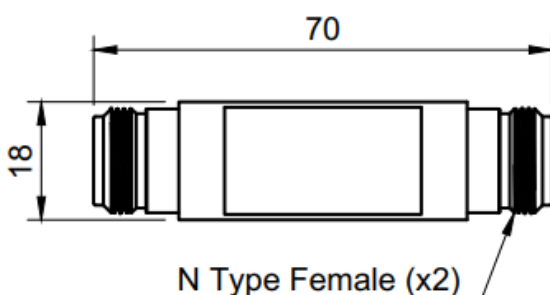

Mechanical specification

Design	GRP housing
Dimensions housing	70 x Ø18 mm
Weight	0.072 kg
Temperature range	-55°C to +71°C, -67°F to +160°F