

Features


- Frequency 1.6-30 MHz
- Low profile stainless steel whip covered with heat shrink tube
- Standard NATO pattern spring base
- Intended for use with a short coaxial cable to a man-pack radio built in tuner

Electrical Specifications


Frequency range	1.6-30 MHz
Resonant frequency	25 MHz
Power rating	25 W
Radiation diagram	Omnidirectional
Polarization	Vertical
Connector	BNC Female

Mechanical Specifications

Design	Low profile end fed whip - stainless steel covered with heat shrink tube. Metal parts are aluminium and stainless steel
Length	2.75 m (9 ft)
Weight	2.0 Kg
Finish	Black
Temperature range	-55 °C, +71 °C; -67 °F, +160 °F

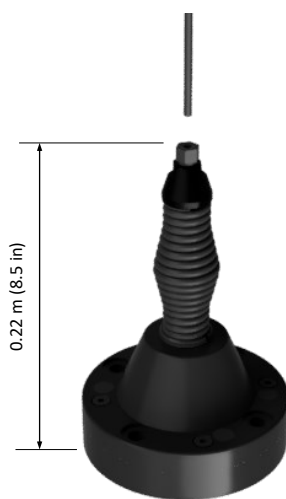

Removable whip

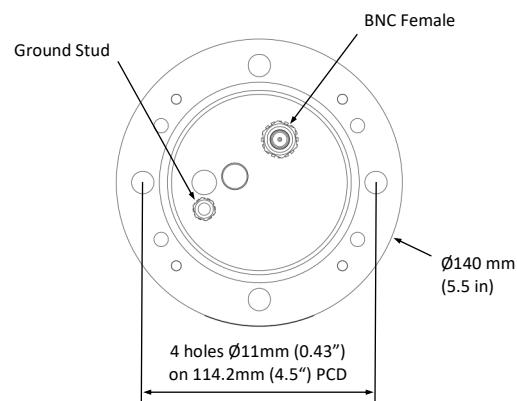

Standard 4-hole Mounting