



Features:

- Multiband LTE , 698-960/1710-2170/2500-2700 MHz
- Dipole design with gooseneck
- Designed for man-portable radios/modems
- Rugged high quality antenna with a durable construction
- Connector options

Electrical Specification


Frequency range	698-960 MHz 1710-2170 MHz 2500-2700 MHz
VSWR	< 3.5:1
Nominal Impedance	50 Ω
Power rating	5W CW, 10W for short periods (< 30 sec's)
Gain	See curve
Polarisation	Vertical
Connector	TNC Male or SMA Male (others on request)

Mechanical Specification

Design	Wideband dipole, and gooseneck
Length	290mm
Diameter	20mm
Weight	70g
Finish	Black paint
Temperature range	-55°C, +71°C, -67°F, +160°F



VSWR

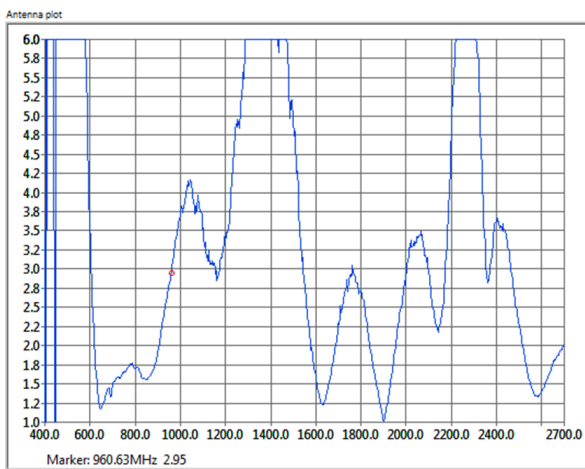

Gain

