



Features:

- 700-6000 MHz
- UHF / L-S-C Band
- Dipole design with gooseneck
- Designed for man-portable radios/modems
- Rugged high quality antenna with a durable construction


Electrical Specification

Frequency range	700-6000 MHz
VSWR	< 3.5:1 (see curve)
Nominal Impedance	50 Ohm
Power rating	10W CW
Gain	See curve
Radiation Pattern	Omnidirectional
Polarisation	Vertical
Connector	TNC Male


Mechanical Specification

Design	Wideband dipole, and gooseneck
Length	275 mm
Diameter	20 mm
Weight	70g
Finish	Black paint
Temperature range	-55°C, +71°C, -67°F, +160°F

Gain

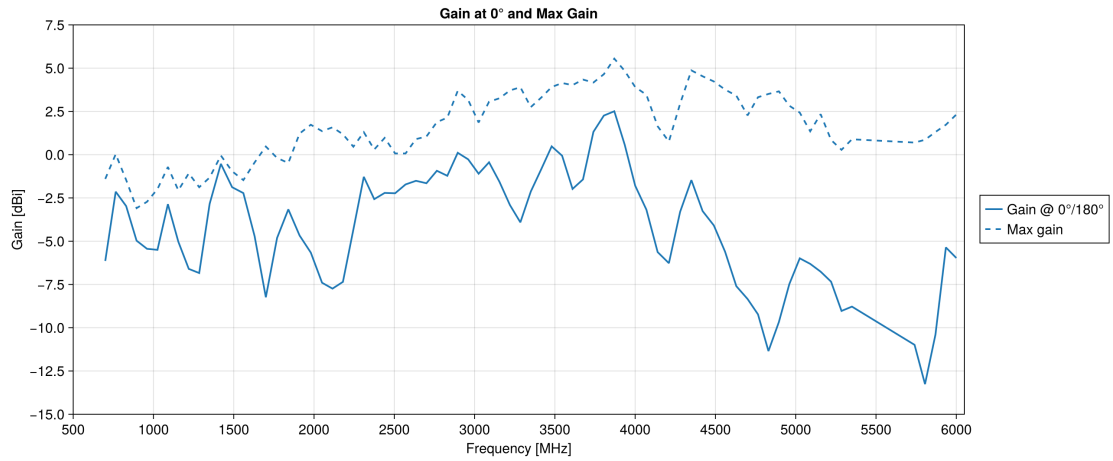

VSWR

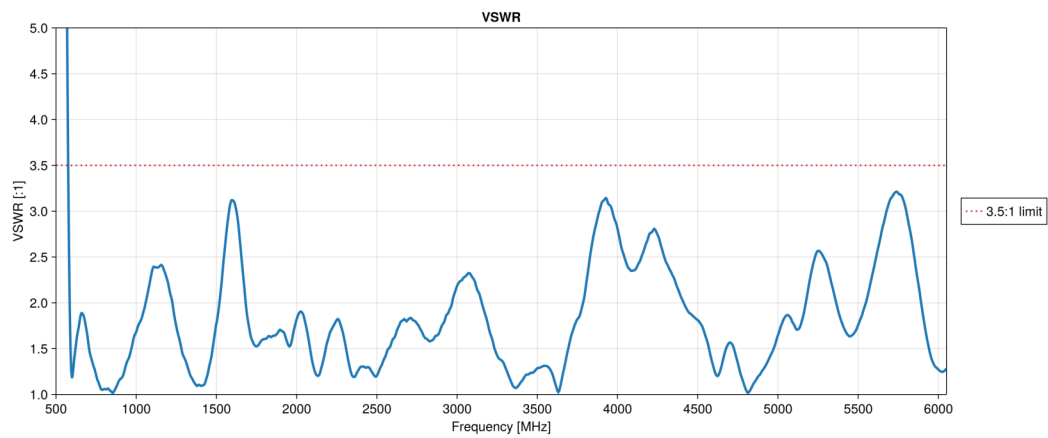

Radiation Patterns

